

CAMPASPE LOCAL FLOODPLAIN DEVELOPMENT PLAN PRECINCT OF COROP LAKES, OCTOBER 2010

1.0 Application

This local floodplain development plan applies to the floodplains of Corop Lakes, Sheepwash Depression, Cornella and Wanalta Creeks as shown on the attached plan, and which is within either the Floodway Overlay or Land Subject to Inundation Overlay of the Campaspe Planning Scheme (or any other area known to be subject to inundation by flooding). This local floodplain development plan has been prepared to provide a performance-based approach for decision making that reflects local issues and best practice, including flood risk assessment, in floodplain management.

2.0 Flood History

The frequency of flooding in this area has not been studied in detail. Documented evidence shows significant flooding in this area occurred in 1950 and October 1974; however flooding is likely to have occurred in other years. The 1950 flood was an extremely large flood and caused widespread flooding. The October 1974 flood was approximately a 50-year ARI event on Cornella Creek, but only a 4-year ARI event on the Wanalta Creek.

3.0 Flood Information

The extent of flooding has been determined from flood mapping completed in 2000 by NRE. The project made use of historic flood levels documented in past floods, aerial flood photography, and surface level information. LSIO and FO areas are based on the relative flood risk assessed for different parts of the floodplain, considering factors such as flood depth, velocity, natural storage, flood frequency and flood duration.

Major flooding in the upper reaches of Cornella and Wanalta Creeks is relatively well confined. Further downstream there is a transition from the relatively steep and narrow tributaries to the flat and wide floodplain of the Corop Lakes area, where the flood extent is unlikely to vary significantly for a wide range of floods. The whole area at and downstream of the Lakes is subject to overland flow in large floods and, in order to minimise flood impacts on adjacent properties, buildings and works need to be located away from drainage lines and flow paths. The depth of flooding along drainage lines and flood storage areas will be substantial

The duration of flooding in the lower reaches is significant. Flood photography from the 1974 flood taken 9 days after the flood peaked at the Cornella Creek gauge station, showed substantial areas were still under water in the Corop Lakes area.

4.0 Flood Impacts

Flood impacts in the area are significant, resulting in road closures, loss of access for residents, disruption to schools, property isolation, risks to emergency personnel during sand bagging and evacuation operations, and damage to buildings constructed below flood level. During major floods, there are also likely to be substantial rural and infrastructure flood damages. Flood impacts for FO areas are generally greater than LSIO areas, as the velocities, depths and frequency of flooding are generally greater.

5.0 Development Requirements

An application to construct a building, construct or carry out works or subdivide land, must be accompanied by four sets of plans and supporting documents that demonstrate the following relevant development requirements have been met.

Where relevant, the supporting documents and plans (drawn to scale) must show the following:

- The boundaries and dimensions of the property.
- A regional locality plan showing the property whereabouts within the region, including roads, streams and other prominent land marks.
- The layout plan of the existing and proposed building, works or subdivision boundaries.
- Floor level of any existing and proposed buildings to Australian Height Datum.
- Natural ground levels of the proposed dwelling site to Australian Height Datum, taken by a licensed surveyor.
- Natural ground levels along access routes to flood free land (as indicated by the planning scheme flood overlays and zone) to Australian Height Datum, taken by a licensed surveyor. The access route includes access along any relevant government road to the property and then to the proposed dwelling location.

6.0 General Development Requirements for FO or LSIO

6.1 Dwelling

- a new dwelling must not obstruct natural flow paths or drainage lines.
- the construction of a dwelling (single or multi-dwellings), including a replacement dwelling, must not be located closer than 50 metres to an existing river levee, unless the purpose of the levee is to protect a dwelling, or the levee is less than 1 metre in height.
- the floor level of any new single dwelling, is set at least 300 mm above the 100-year ARI flood level or a higher level set by the responsible authority.

6.2 Dwelling Extensions

- where a dwelling extension (or multiple extensions) is greater than 20 m² and below the nominal flood protection level the owner must:
 - use water resistant materials up to the nominal flood protection level.
 - within the **FO** areas obtain approval from the responsible authority and the floodplain management authority.
- the construction of the ground floor area of any dwelling extension (single or multiple), which is more than 300 millimetres below the 100-year ARI flood level and greater than 20 m² to the existing dwelling at 1st October 1998, must be set at least to the nominal flood protection level as determined by the floodplain management authority or a higher level as determined by the responsible authority.
- the construction of the ground floor area of any dwelling extension (single or multiple) between the 100-year ARI flood level and 300 millimetres below the 100-year ARI flood level, must not be more than 40 m² greater than the existing dwelling at 1st October 1998. Where a dwelling extension (or multiple extensions) is greater than 20 m² and below the nominal flood protection level the owner must:

- enter into an agreement with Council under Section 173 of the *Planning and Environment Act 1987*, stating that combined ground floor area of the constructed extension together with any future extensions, must not be lower than the highest existing ground floor level, and must not exceed 40 m². Extensions beyond 40 m² must be set at least to the nominal flood protection level.
- the construction of the ground floor area of any dwelling extension (single or multiple) between the 100-year ARI flood level and the nominal flood protection level, must not be more than 80 m² to the existing dwelling at 1st October 1998. Where a dwelling extension (or multiple extensions) is greater than 20 m² and below the nominal flood protection level the owner must:
 - enter into an agreement with Council under Section 173 of the *Planning and Environment Act 1987*, stating that combined ground floor area of the constructed extension together with any future extensions, must not be lower than the highest existing ground floor level, and must not exceed 80 m². Extensions beyond 80 m² must be set at least to the nominal flood protection level.

7.0 Particular Development Requirements for Residential, Industrial, Township and Business Zone areas

None specified.

8.0 Particular Development Requirements for FO or LSIO within rural areas

8.1 Dwelling

- the construction of a new single dwelling on a lot must be sited on land where the 100-year ARI flood depth is less than 0.5 metres above the natural surface level, and is less than 0.8 metres above the natural surface level along the defined access route to the dwelling site, unless a lot is greater than 80 hectares.
- the construction of a new single dwelling on a lot, including a replacement dwelling must be sited on the highest available ground unless the applicant can demonstrate to the satisfaction of the responsible authority and floodplain management authority that an alternative site is more suitable.

8.2 Buildings (other than dwelling, Industrial, Shop, and Retail Buildings)

- the construction of any new non habitable building must be sited on the highest available ground unless the applicant can demonstrate to the satisfaction of the responsible authority and floodplain management authority that an alternative site is more suitable.
- any non habitable building must be aligned so that their longitudinal axis is parallel to the predicted direction of flood flow.


8.3 Works

- any earthworks do not obstruct natural flow paths or drainage lines on land located within the overlay.
- any earthen land fill at the site of a new building or a building extension should be no more than 2 metres from the building footprint.
- any works that are designed to protect the immediate surrounds of existing habitable dwellings, where the floor level is below the 100-year ARI flood level, and do not enclose an area of more than 1,000 m² including the footprint area of works.





8.4 Subdivision

- any subdivision does not increase the number of lots, except for the purposes of a lot excision agreed to by the responsible authority and the floodplain management authority, or any subdivision located partly within FO or LSIO is structured so that:
 - new lot boundaries (other than existing and/or realignment of lot boundaries) are sited on land where the 100-year ARI flood depths are less than 0.5 metres; and
 - each lot is accessible via a defined access route where the 100-year ARI flood depths are less than 0.8 metres.

Campaspe Local Floodplain Development Plans Precinct of Corop Lakes

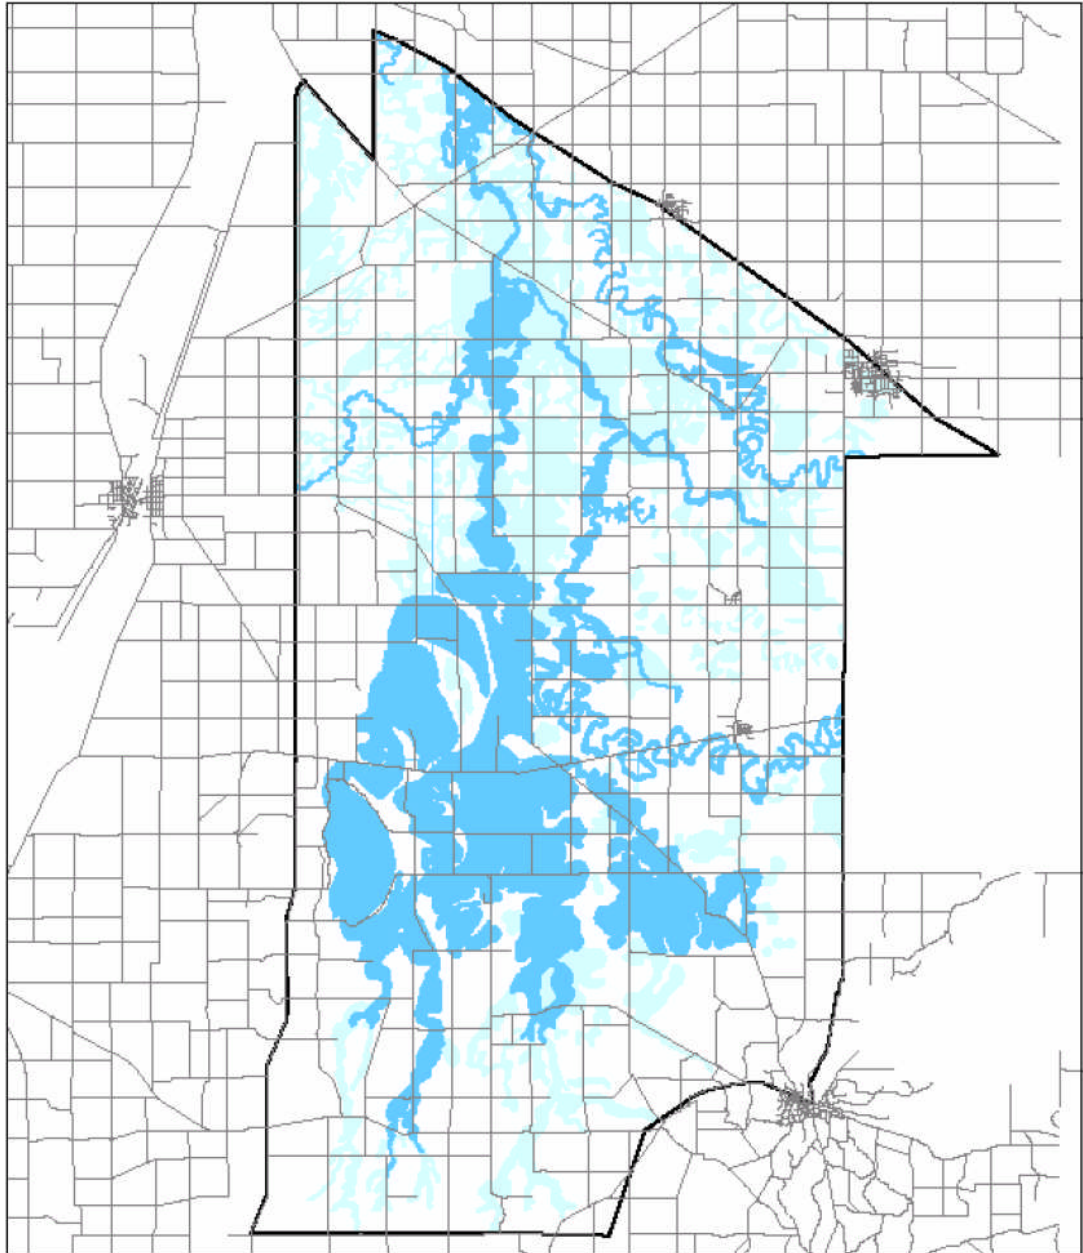

LEGEND

-  Roads
-  Corop Lakes Precinct
-  LSIO region
-  FO region



PREPARED BY: PLANNING DATA AND MAPPING TEAM
DEPARTMENT OF INFRASTRUCTURE

These maps showing FO & LSIO areas are indicative only and not to be used as a substitute over the planning scheme maps.

